


Q-TRAN-713S Installation and Anchoring Schedule

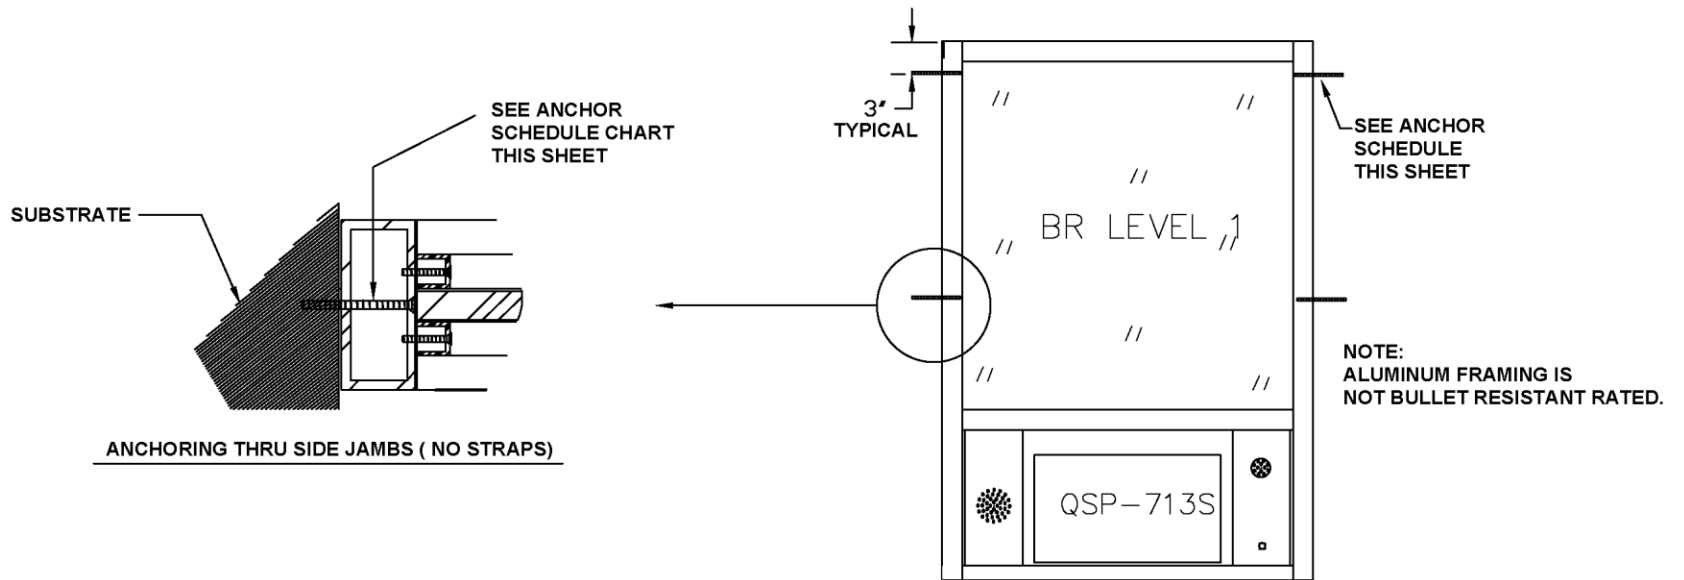

ANCHOR SCHEDULE		
SUBSTRATE	ANCHOR	MINIUM PENETRATION INTO SUBSTRATE
STEEL (16 GA. MIN.)	1/4" SHEET METAL SCREWS	MIN. PROTRUSION OF 3 THREADS BEYOND FULL ENGAGEMENT
CONCRETE	1/4" DIAMETER CONCRETE SCREW	1.25" INTO CONCRETE
WOOD BUCK	# 14 WOOD SCREW	1.50" INTO WOOD (REQUIRES DOUBLE 2X BUCK)

Represented by Interbank-Equipment
P. O. Box 632
Black Canyon City, AZ 866-286-4400

ANCHOR SCHEDULE			
Aluminum Commercial Pass-Thru Window			
DRAWING DATE:	SIZE FSCM NO.	DWG. NO.	REV
01-21-2010		QSP-MINI	1
DRAWN BY:	NO SCALE	SHEET: 1 of 1	
BRIAN C.			