


**TYPICAL  
INSTALLATION DRAWINGS  
FOR FLUSH MOUNT MANUAL BI-FOLDING OUTSWING  
WINDOWS**

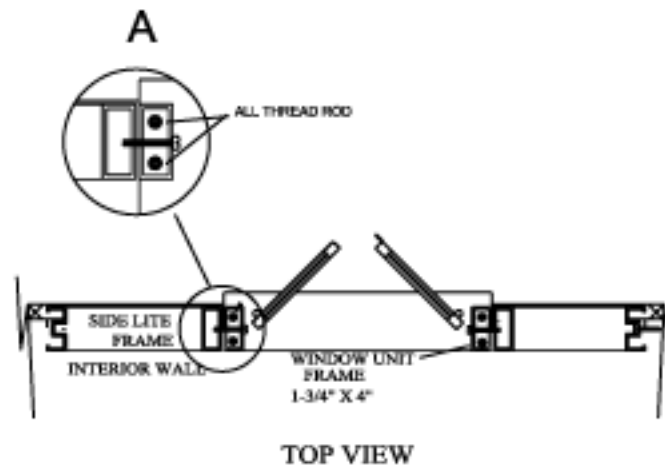

- 1) QUIKSERV WINDOWS MUST BE INSTALLED LEVEL AND SQUARE TO WORK PROPERLY
- 2) ANCHOR SCREWS TO BE SUPPLIED BY CONTRACTOR
- 3) ANCHOR THROUGH EACH SIDE AT TWO PLACES APROX. 5" AT TOP AND BOTTOM OF EACH JAMB SEE FIG. A
- 4) CAUTION WHEN DRILLING THRU SIDE JAMBS - ALL THREAD RODS ARE LOCATED IN EACH SIDE JAMB SEE FIG. A
- 5) RECOMMENDED HEIGHT FROM FLOOR TO SERVICE OPENING TO BE 36" (CHECK ANY AND ALL LOCAL OR CITY CODES)
- 6) SILICONE ALL EXTERIOR AND INTERIOR JOINTS.
- 7) ALL OTHER TYPE OF ANCHORING TO BE APPROVED BY ENGINEER

NOTE: THIS DRAWING EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN ORIGINATED AND OWNED BY QUIKSERV CORP., AND IS SUBMITTED UNDER A CONFIDENTIAL RELATIONSHIP. ALL PATENT, MANUFACTURING, SALE RIGHTS REGARDING THE SAME ARE RESERVED EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE RECIPIENT AGREES BY ACCEPTING THESE DRAWINGS NOT TO SUPPLY OR DISCLOSE ANY INFORMATION REGARDING THEM TO ANY UNAUTHORIZED PERSON.

**Interbank-Equipment  
P. O. Box 632  
Black Canyon City, AZ**

**INSTALLATION DRAWINGS FOR FLUSH MOUNT  
MANUAL BI-FOLDING OUTSWING WINDOWS**

Submitted By: BRIAN COBLE

Date: 1/20/2006

Sheet: W-IN008