


Q-TRAN-1019 Installation and Anchoring Schedule

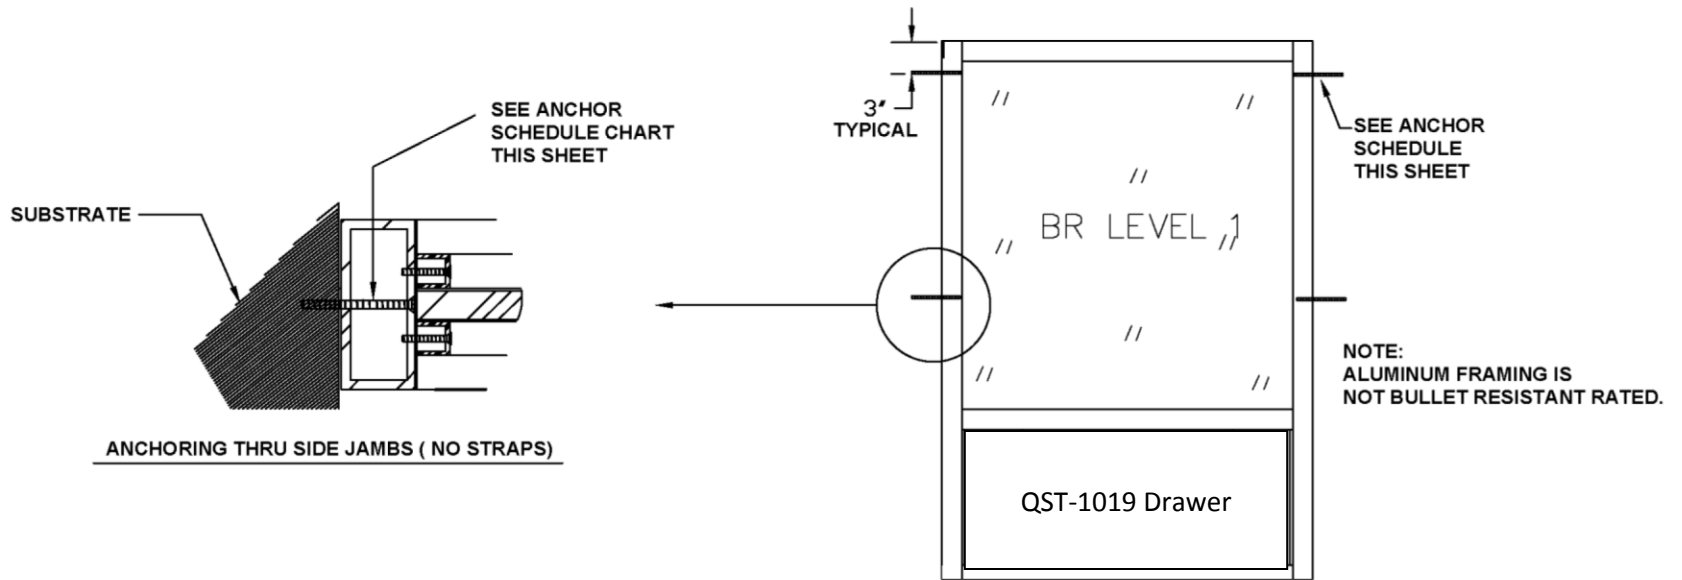

ANCHOR SCHEDULE		
SUBSTRATE	ANCHOR	MINIUM PENETRATION INTO SUBSTRATE
STEEL (16 GA. MIN.)	1/4" SHEET METAL SCREWS	MIN. PROTRUSION OF 3 THREADS BEYOND FULL ENGAGEMENT
CONCRETE	1/4" DIAMETER CONCRETE SCREW	1.25" INTO CONCRETE
WOOD BUCK	# 14 WOOD SCREW	1.50" INTO WOOD (REQUIRES DOUBLE 2X BUCK)

Represented by Interbank-Equipment
P. O. Box 632
Black Canyon City, AZ 866-286-4400

ANCHOR SCHEDULE			
Aluminum Commercial Pass-Thru Window			
SIZE	FSCM NO.	DWG. NO. QSP-MINI	REV
DRAWING DATE: 01-21-2010			1
DRAWN BY: BRIAN C.	NO SCALE	SHEET: 1 of 1	